



Automatic lubricator for single lubrication points



G | LUBE

Advantages

Reliable

Gas production (N₂) through electronically controlled chemical reaction, reliable despite changing ambient temperatures

Economical

Lower lubrication costs, lower lubricant consumption, longer machine service life

Eco-friendly

Eco-friendly product, easy disposal


Flexible

3 sizes, setting can be changed anytime, self-filling possible, no tools required for activating

Certificated



Specifications

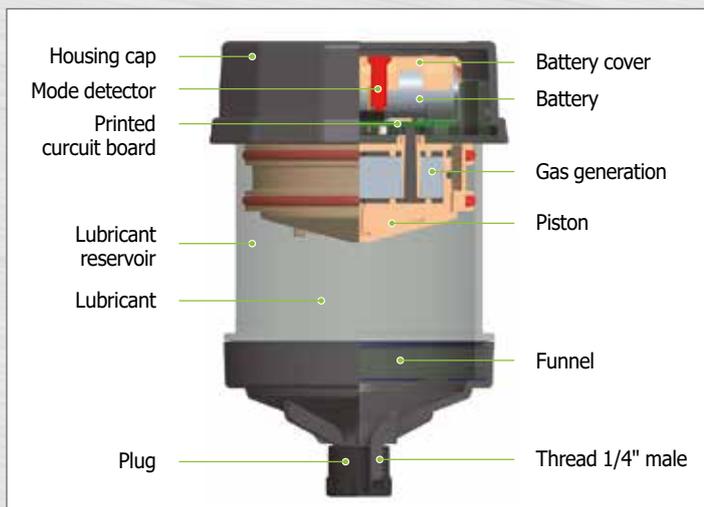

Drive

Gas driven (N₂)

Operating pressure

Max. 5 bar (73 psi)

Volume

60 ml / 120 ml / 240 ml

Operating temperature

-20 °C to +55 °C

Lubricating medium

Oils and greases up to NLGI 2

Setting

1, 3, 6, 9 & 12 months

Operational voltage

3 V (battery)

Filling

empty / standard filling / special filling

Dimensions (Ø x height)

60 ml: 77 x 91 mm
120 ml: 77 x 111 mm
240 ml: 77 x 156 mm

Certifications

ATEX, IP68, CE

Applications



G-LUBE is applicable in nearly all branches and areas. Activating does not require any tools. For an indirect installation we recommend our wide range of accessories.