

Laundry

Scope- To provide a system of Auto-Lubrication

- Auto-lubricate Bearings on Ironer (Kannegeiser & Jensen + others)
- Continuous Batch Washer Bearings.




Products-

Lubricus C system

The Lubricus C system controller is used for external monitoring of the lubricus, to which up to four lubricus lubrication systems (4 outlets each = 16) can be connected.

The connected Lubricus lubricating devices can be individually controlled and monitored using the Lubricus controller. The dialogue takes place via a simple to operate LCD display.

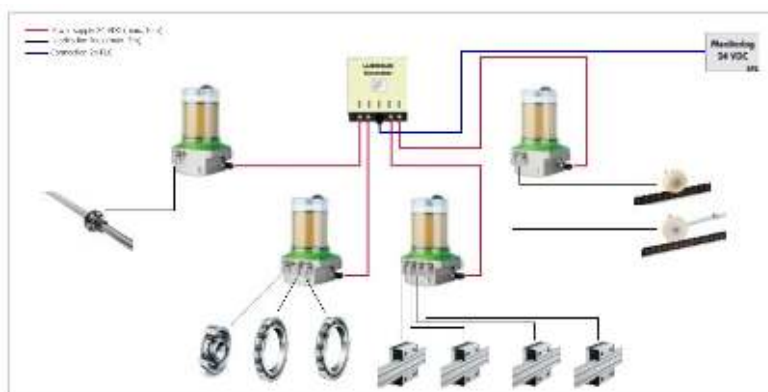

TCE Transmission Ltd

Tel: 0121 369 3659 E mail: info@tcet.co.uk

www.tcet.co.uk <https://autolubricatorshop.co.uk>

Lubricus B

This is available with either one or two outlets and can reliably provide lubrication points with lubricant for up to 36 months.

LUB-B-1 and LUB-B-2, The battery operated variant of the Lubricus lubrication system is always used when an autarchic operation desired or necessary. The high-efficient battery pack can optionally be set to empty the lubricant cartridge over a period of 1-36 months.

Product detail:

- 1 or 2 outlets, 70 bar supply pressure
- LCD display with LED
- Stand Alone Operation



Applications-

- Ironer Extraction Bearings
- Batch Washer Bearings
- Folding machines
- Washing machines
- Flatwork irons
- Dryers
- Feeders
- Washer extractors.

TCE Transmission Ltd

Tel: 0121 369 3659 E mail: info@tcet.co.uk

www.tcet.co.uk <https://autolubricatorshop.co.uk>